

ISDN DC-DC CONVERTER

Type	V _i	V _o	I _o
GS1T70-D540/1	25 to 115 V	5 V	90 mA
		40 V	10,5 mA

FEATURES

- Wide operating line termination voltage
- Peak input overvoltage withstand: 1kV for 1.2/50μs
- Peak overvoltage withstand on Output 2 (40V): 250V for 10/700μs
- Positive or negative input voltage polarity
- Input and output filtering
- Short-circuit protection on both outputs
- Input power during shortcircuit within specification
- Minimum current drain during stand-by condition: 10μA for V_i<18V
- Input-output isolation voltage: 2000V_{RMS} for 60 seconds
- Output1-output2 isolation voltage: 2000V_{RMS} for 60 seconds
- Mechanical dimensions (L x W x H): 50.8 mm x 50.8 mm x 18 mm (2" x 2" x 0.71")

DESCRIPTION

The GS1T70-D540/1 converter has been designed for the "U" interface of an ISDN-NTBA (Network Termination Basic Access) system with either 4B3T or 2B1Q standard transmission.

It meets the requirements of the following specifications:

EN 60950

CCITT I.430

CCITT G.960


CCITT G.961

ETS 300 002

ETS 300 012

ETS 300 047 (ISDN BASIC ACCESS, Safety and Protection)

Two isolated outputs, 5V/90mA and 40V/10.5mA are supplied. The converter offers short-circuit protection (short-circuit on 40V output doesn't affect 5V output and the input power never exceeds the

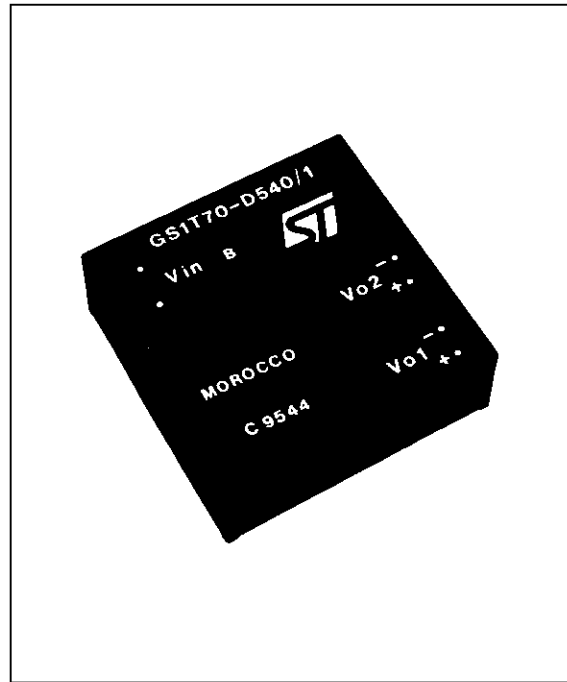

limit of the specification), input either voltage polarity, 80% minimum efficiency at maximum load, input and output filtering to meet very stringent noise requirements.

The input and the output 2 (40V) stages are protected against differential overvoltage up to 1kV (1.2/50μs) and 250V (10/700μs) respectively.

When the input voltage is below 18V, the converter offers a very high input impedance and a maximum quiescent current of 10μA.

These features allow the converter to operate directly connected to the telephone line without any external components.

In addition, the wide operating input voltage range allows it to operate within the whole range of LT (Line Termination) battery voltage and its relevant line resistance.

2000V_{RMS} isolation voltage for 60 second is provided between input to outputs and between output 1 and output 2.

GS1T70-D540/1

ELECTRICAL CHARACTERISTICS ($T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

Std. Conditions:

Line Termination voltage: 47 to 71V
87 to 99V

Line Resistance (R_s): 10 to 560 Ω
550 to 1400 Ω


Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_i	Input Voltage	Std. Conditions	25		115	V
V_{ipk}	Input Transient Overvoltage	$t = 1.2/50\mu\text{s}$ (pulse)			1	kV
V_{ist}	Start Up Input Voltage	See fig. 2	28		44	V
V_{o1}	Output Voltage 1	Std. Conditions	4.75	5	5.25	V
V_{o2}	Output Voltage 2	Std. Conditions	34	40	42	V
V_{or1}	Output Ripple Voltage 1	Std. Conditions BW = 0 to 20MHz		5	20	mVpp
V_{or2}	Output Ripple Voltage 2	Std. Conditions BW = 0 to 20MHz		10	30	mVpp
e_N	Input Noise Voltage	Std. Conditions BW = 0 to 20MHz		10	30	mVpp
I_{o1}	Output Current 1	Std. Conditions $I_{o2} = 0$ to 10.5 mA $V_{o1} = 5\text{V}$	2		90	mA
I_{o1l}	Output Current 1 Limit Initiation	Std. Conditions $V_{o1} = 4.75$ to 5.25V	110		130	mA
I_{o2}	Output Current 2	Std. Conditions $I_{o1} = 2$ to 90 mA $V_{o2} = 40\text{V}$	0		10.5	mA
I_{osc2}	Output 2 Short Circuit Current	Std. Conditions Output Shorted (Indefinite time)	9		14	mA
V_{is}	Isolation Voltage (pulse)	Input to Output 1 Input to Output 2 Output 1 to Output 2	2000			VRMS
T_{op}	Operating Ambient Temperature Range		0		+80	$^{\circ}\text{C}$
T_{stg}	Storage Temperature Range		-40		+85	$^{\circ}\text{C}$

OUTPUT POWER CHARACTERISTICS

LT (Line Termination Voltage) = 47V to 71V R_s (Line Resistance) = 10 to 560 Ω				LT (Line Termination Voltage) = 87V to 99V R_s (Line Resistance) = 550 to 1400 Ω			
Max Input Power (mW)	NT Status	Min Output Power 1 (5V)[mW]	Min Output Power 2 (40V)[mW]	Max Input Power (mW)	NT Status	Min Output Power 1 (5V)[mW]	Min Output Power 2 (40V)[mW]
450	Activated	320	0	450	Activated	320	0
950	Activated Emergency	330	410	950	Activated Emergency	330	410
90	Deactivated	25	0	90	Deactivated	25	0
180	Deactivated Emergency	25	45	180	Deactivated Emergency	25	45
950	Activated with 40 V Short circuit	330	Short circuit	950	Activated with 40V Short circuit	330	Short circuit

CONNECTION DIAGRAM AND MECHANICAL DATA

Figure 1.

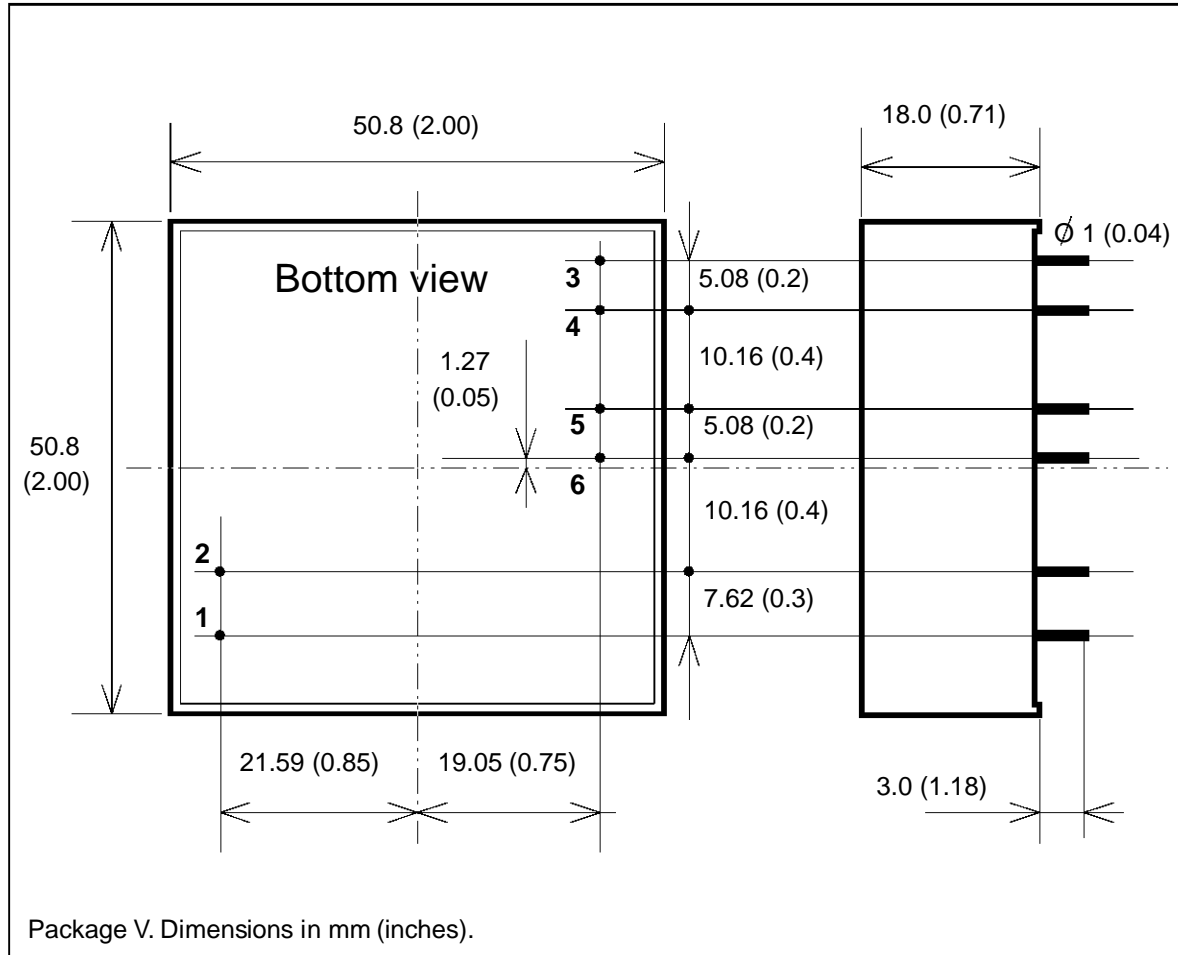

PIN DESCRIPTION


Pin	Description
1	Input (either polarity).
2	Input (either polarity).
3	+5V Output.
4	Return for +5V Output.
5	+40V Output.
6	Return for +40V Output.

VOLTAGE SUPPLY OPERATING AREA

Figure 2 shows the Voltage Supply Operating area during a switching OFF-ON sequence.

The start-up voltage is 44V maximum. When the input voltage is below 18V the maximum quiescent current is lower than 10µA.

Figure 2.

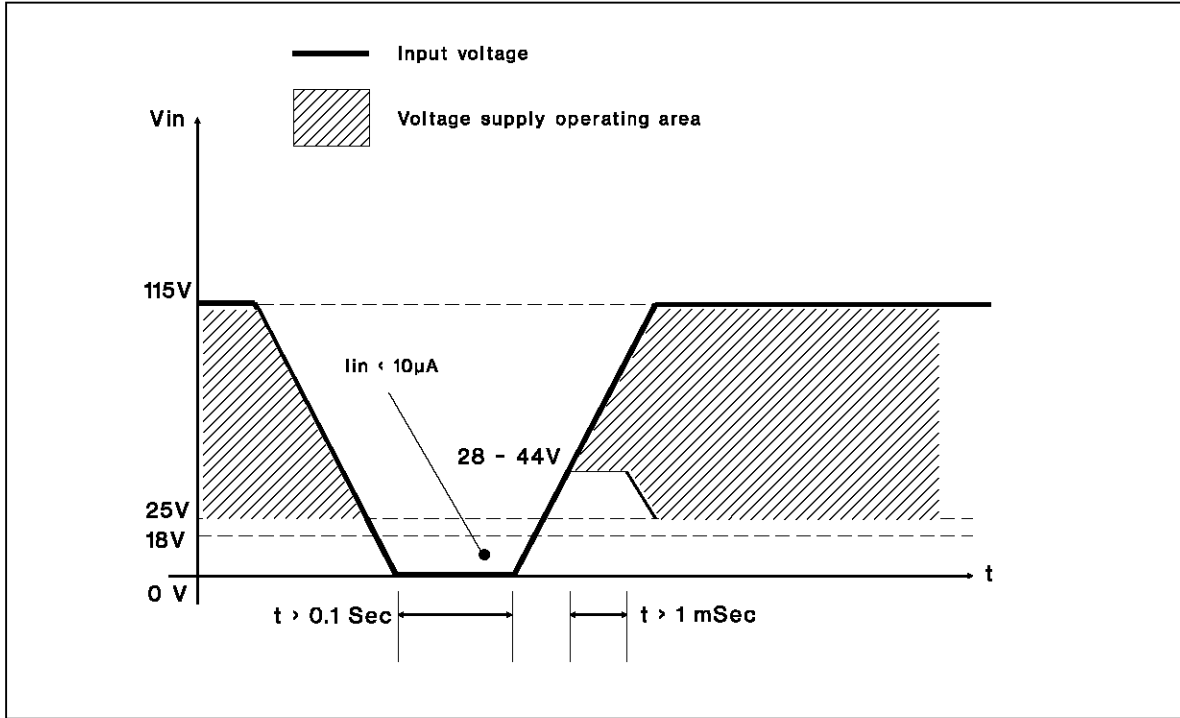

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1996 SGS-THOMSON Microelectronics – All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES
 Australia - Brazil - China - Canada - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.